



कार्यालय, नगर पालिक निगम, कोरबा (छ.ग.)

मुख्य कार्यालय - साकेत भवन, आई.टी.आई. चौक, कोरबा (छ.ग.)

दर्दी जोन

फा.क्र./726,728,730,731,732,733, 735, 734 /निर्माण (दर्दी जोन)/2025/

कोरबा, दिनांक 09.06.2026

प्रथम निविदा आमंत्रण की सूचना

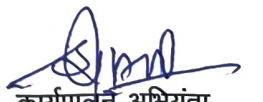
लोक निर्माण विभाग में एकीकृत पंजीयन प्रणाली अंतर्गत सक्षम श्रेणी में पंजीकृत ठेकेदारों से निम्नलिखित निर्माण कार्य हेतु मैनुवल निविदा वेबसाइट से डाउनलोड कर मुहरबंद लिफाफे में निविदा आमंत्रित की जाती है :-

- निर्धारित प्रारूप में निविदा प्रपत्र प्राप्त होने की अंतिम तिथि - दिनांक 01.07.2026 सायंकाल 3:00 बजे तक
- निविदा खुलने की अंतिम तिथि - दिनांक 01.07.2026 सायंकाल 4:30 बजे तक

क्र.	कार्य का नाम	प्राक्कलन राशि में	धरोहर राशि रु में	निविदा प्रपत्र का मूल्य	निविदा प्रपत्र	कार्यावधि	ठेकेदार का वर्ग	निविदा खुलने की अंतिम तिथि
1.	वार्ड कं. 48 हसदेव कमांक 01 अंतर्गत मॉ कलमी दाई के पास सार्वजनिक सामुदायिक एवं सांस्कृतिक भवन का संधारण एवं भवन में नयी सुविधा की व्यवस्था। (पार्षद मद)	7,00,000/-	5,300/-	750/-	Form-A	04 माह	सक्षम श्रेणी	01.07.2026
2.	वार्ड कं. 59 फर्टिलाइजर बर पेंड शिव मंदिर के पास अहाता निर्माण एवं अन्य विस्तार कार्य। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	3,00,000/-	3,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
3.	वार्ड कं. 55 नागिन भांठा सुमेधा में स्वास्थ्य केन्द्र के पास निर्माण। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
4.	वार्ड कं 54 जमनीपाली स्थित कबार आश्रम में शेड निर्माण कार्य। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
5.	वार्ड कं. 49 ओडिया बस्ती में मंच के सामने शेड निर्माण कार्य। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
6.	वार्ड कं. 52 जनकपुरी पाईप लाईन शिव मंदिर के पास मंच निर्माण। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
7.	वार्ड कं. 58 श्यामनगर साडा कालोनी में जोगी जनरल स्टोर्स के पास का जीर्णोद्धार एवं अन्य विस्तार कार्य। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026
8.	वार्ड कं. 53 जनकपुरी मोहल्ला हनुमान मंदिर पावर सिटी पाईप लाईन के पास मंच निर्माण। (विधायक-प्रभारी मंत्री मद वर्ष 2025-26)	5,00,000/-	5,000/-	750/-	Form-A	03 माह	सक्षम श्रेणी	01.07.2026

उपरोक्त कार्यों की निविदा की सामान्य शर्त, धरोहर निविदा विज्ञप्ति, निविदा दस्तावेज व अन्य जानकारी कार्यालयीन अवधि में कार्यालय से प्राप्त की जा सकती है, साथ ही यह जानकारी विभागीय वेबसाइट Website : www.korbamunicipal.in एवं www.uad.cg.gov.in में देखा एवं डाउनलोड किया जा सकता है।

// स्वच्छ भारत निर्माण में योगदान दें //


कार्यपालन अभियंता
नगर पालिक निगम
कोरबा (छ.ग.)



OFFICE OF THE MUNICIPAL CORPORATION, KORBA (C.G.)
NAME OF WORK - CONSTRUCTION OF SHED IN KABIR AASHRAM WN 54

As per Sor :- Schedule of Rates Public Works Department [PWD BUILDING 01-01-2015], AMD 08


NO.	ITEM	NO.	L	B	D/H	QTY	UNIT	RATE	AMOUNT
1	1.2 Surface dressing of the ground including removing vegetation and making up undulations and in-equalities not exceeding 15 cms in depth/ height including disposal of rubbish upto 1.5 m lift and lead upto 50m (at least 5m away from the dressed area).	1	25	7		175	SQM	7.2	1260
2	1.1 Excavation for all types and sizes of foundations, trenches and drains or for any other purpose including disposal of excavated stuff upto 1.5 m lift and lead upto 50m (at least 5m away from the excavated area), including dressing and leveling of pits. 1.1.1 In all types of soils.	20	0.8	0.8	0.8	10.24	CUM	185	1894.4
3	1.17 Filling from available excavated stuff (Excluding rock) in trenches, plinth, sides of foundation etc. in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering with a lead upto 50 M. and lift upto 1.5 M.	1				5.12	CUM	65	332.8
4	1.18 Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering, including dressing etc. complete	20	0.8	0.8	0.1	1.28	CUM	371	474.88
5	2.1 Providing and fixing form work including centring, shuttering, strutting, staging, propping bracing etc. complete and including its removal at all levels, for: 2.1.1 Foundations, footings, bases of columns plinth beam, curtain wall in any shape and size and all type of wall below plinth level.	80	0.7	0.2		11.2			

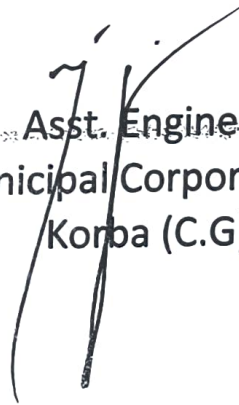
		80	0.6	0.8		38.4			
						49.6	SQM	139	6894.4
6	3.1 Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work. 3.1.4 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 40mm nominal size).	20	0.8	0.8	0.1	1.28	CUM	3552	4546.56
7	3.2 Providing and laying nominal mix reinforced cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work. 3.2.1 1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20mm nominal size).	20	0.7	0.7	0.1	0.98			
		20	0.6	0.6	0.8	5.76			
						6.74	CUM	4163	28058.62
9	9.1 Structural steel work in single section including cutting, hoisting, fixing in position and applying a priming coat of red oxide zinc chromate primer.					2000	KG	61.5	123000
10	9.3 Steel work in tubular (round, square or rectangular hollow tubes etc.) structure in built-up sections, trusses and frame work including cutting, hoisting, fixing in position upto a height of 5m above plinth level, consisting of columns trusses, roof and bottom purlins, base plate, holding down bolts, wind ties bracing (if required), bolts, nuts and washers for fastening etc. complete with applying a priming coat of red oxide zinc chromate primer. 9.3.2 Electric resistance or induction butt welded tubes Grade-300					1350	KG	93.5	126225

11	9.6 Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of red oxide zinc chromate primer. 9.6.2 In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.					600	KG	68	40800
12	10.10 Extra for providing and fixing wind ties of 40x6mm flat iron section.	1				200	M	118	23600
13	10.12 Supply and fixing of polymer pre-coated galvalume profile sheets (PPGL) of approved size, shape and pitch of corrugation, total coated thickness (TCT) 0.60 mm +/- 5%, epoxy primer on both side of the sheet and colour polyester top coat 18-20 microns and 6-7 microns on bottom. Sheet should have protective guard film of 25 microns minimum to avoid scratches while transportation and should be supplied in single length upto 12 metre or as desired by Engineer-in-charge. The sheet shall be fixed using self drilling /self tapping screws of size (5.5x 55mm) with EPDM seal or with polymer coated J or L hooks, bolts and nuts 8mm diameter with bitumen and G.I. limpet washers or with G.I. limpet washers filled with white lead complete upto any pitch in horizontal/ vertical or curved surfaces excluding the cost of purlins,	1	25	7		175	SQM	693	121275
14	11.1 Providing and making 6mm thick cement plaster of mix. 11.1.1 In Cement mortar 1:3 (1 cement : 3 fine sand	80	0.6	0.3		14.4	SQM	93	1339.2

16	14.71 Providing and applying satin/matt finish Enamel paint mimimum 2 coats in all surface applying @ 0.75 lit/ 10 Sqm up to required finish as per relevent I.S. code 2932: 2013 of (Product such as Asian satin Enamel, Dulux Promise Premium Enamel, Nerolac Synthatic Enamel, Opus Prime enamel) inclusive of providing abro tape on edges and article and cleaning of door, windows,floor and surface as required with all tools tackle and labour etc. complete for the work.	20	5	0.5		50			
		40	22	0.1		88			
		30	3	0.15		13.5			
						151.5	SQM	133	
		TOTAL							20149.5
									499850.4

SAY AS5.00... LACS RUPEES ONLY


Sub Engineer
Municipal Corporation
Korba (C.G)


Asst. Engineer
Municipal Corporation
Korba (C.G)