



कार्यालय, नगर पालिक निगम, कोरबा (छ.ग.)

मुख्य कार्यालय - साकेत भवन, आई.टी.आई. चौक, कोरबा (छ.ग.)

दर्दी जोन

फा.क्र./699/निर्माण (दर्दी जोन)/2025/

कोरबा, दिनांक 26.12.2025

निविदा आमंत्रण की सूचना

लोक निर्माण विभाग से एकीकृत पंजीयन प्रणाली अंतर्गत सक्षम श्रेणी में पंजीकृत ठेकेदारों से निम्नांकित कार्य हेतु प्रमुख अभियन्ता लोक निर्माण विभाग, रायपुर द्वारा प्रचलित PWD Building SOR 01.01.2015 से प्रभावशील दर अनुसूची पर (निविदा खुलने के दिनांक तक समस्त संशोधनों के साथ) कम अधिक या समान दरों पर श्रेष्ठतम अनुसार एवं आयटम दरों पर निम्नलिखित निर्माण कार्य हेतु मैनुअल निविदा वेबसाइट से डाउनलोड कर मुहर बंद लिफाफे में निविदा आमंत्रित की जाती है :-

- निर्धारित प्रारूप में निविदा प्रपत्र प्राप्त होने की अंतिम तिथि
- निविदा खुलने की अंतिम तिथि

- दिनांक 15.01.2026 सायंकाल 3:00 बजे तक
- दिनांक 15.01.2026 सायंकाल 4:30 बजे तक

क्र.	कार्य का नाम	प्राक्कलन राशि में	धरोहर राशि रु में	निविदा प्रपत्र का मूल्य	निविदा प्रपत्र	कार्यावधि	ठेकेदार का वर्ग	निविदा खुलने की अंतिम तिथि
1	वार्ड क्र. 49 अंतर्गत राजीव नगर, उडिया बरती में स्थित मंगल भवन का मरम्मत, संधारण और जीर्णोद्धार कार्य (पार्श्व भू 2025-26, प्रथम निविदा)	7,00,000/-	5,300/-	750/-	Form-A	04 माह	सक्षम श्रेणी	15.01.2025

निविदा की शर्त:-

- निविदा दरे प्रचलित सी.एस.आर.से कम या अधिक प्रतिशत दरों पर दिया जावे सी.एस.आर.के अंतर्गत के आयटमों पर पृथक से आयटम दरों का उल्लेख करने पर निविदा निरस्त मानी जावेगी।
- निविदा के दस्तावेज हाथो-हाथ न लिया जाकर रजिस्टर्ड पोस्ट अथवा स्पीड पोस्ट से प्राप्त किया जावेगा। अन्य माध्यमों यथा कोरियर सर्विस, साधारण डाक इत्यादि से प्राप्त अथवा समयावधि के पश्चात् प्राप्त निविदाओं पर विचार नहीं किया जावेगा। निविदा आयुक्त, नगर पालिक निगम, कोरबा आई.टी.आई. कॉलोनी रामपुर, कोसाबाड़ी जिला-कोरबा (छ.ग.) पिन नं.-495677 के पते पर भेजना होगा। निर्धारित तिथि को सायं 3:00 के पश्चात् प्राप्त निविदाएं स्वीकार नहीं किए जावेंगे।
- निविदा प्रपत्र नगर पालिक निगम, कोरबा के वेबसाइट www.korbamunicipal.in/uad.cg.gov.in डाउनलोड किया जाकर नवीन निविदा प्रपत्र Form - A/B/ABC (जारी दिनों तक समस्त संशोधनों के साथ) आयुक्त नगर पालिक निगम कोरबा के नाम पर देय निर्धारित शुल्क की डीडी के साथ संबंधित कार्य का नाम पूर्ण विवरण सहित भरकर भेजना होगा।
- निविदा प्रपत्र मुहर बंद लिफाफे में मान्य किया जावेगा जो निम्नानुसार होगा:-
(अ) प्रथम लिफाफा में ठेकेदार का जीवित पंजीयन प्रमाण पत्र, आयकर चुकता प्रमाण पत्र, निविदा सूचना आमंत्रण में उल्लेखित अन्य दस्तावेज के साथ निर्धारित निविदा प्रपत्र शुल्क का डीडी, निविदाओं में निविदाकार को फिजिकल दस्तोवज के साथ निविदा सूचना प्रसारित होने के पश्चात् राशि रुपये 100/- के स्टाम्प पेपर पर निष्पादित शपथ पत्र जिसमें संबंधित कार्य का नाम एवं कार्य के निविदा क्रमांक अंकित हो प्रेषित करना अनिवार्य होगा, एवं अमानत राशि का टी.डी.आर./एफ.डी.आर. जो कि आयुक्त, नगर पालिक निगम कोरबा के नाम पर देय होगा प्रस्तुत करना होगा।
(ब) द्वितीय लिफाफा में ठेकेदार द्वारा भरा हुआ निविदा प्रपत्र होगा।
(स) तृतीय लिफाफा में उपरोक्त दोनो लिफाफाएँ होगी तथा आवश्यकता पड़ने पर मूल अभिलेख प्रस्तुत करना होगा।
- जिन ठेकेदारों द्वारा नगर पालिक निगम के किसी ठेके के कार्य में अनुबंध के अनुरूप कार्य न किया गया हो अथवा नगर पालिक निगम के हित के विरुद्ध कार्य किया गया हो उन्हें निविदा भरने की पात्रता नहीं होगी।
- निविदा हेतु इच्छुक ठेकेदारों को उचित वर्ग में पंजीयन की प्रमाणित प्रतिलिपि यदि साझेदारी फर्म हो तो उसका प्रमाण पत्र (पार्टनरशिप डीड) की सत्य प्रतिलिपि, उपलब्ध तकनीकी अमले की जानकारी पिछले 03 वित्तीय वर्षों का आय चुकता प्रमाण पत्र, पेन नम्बर, वैध जी.एस.टी. (जीवित) पंजीयन एवं प्रशिक्षित यंत्री नियुक्त करने संबंधी प्रमाण पत्र, कर्मचारी भविष्य निधि संगठन अंतर्गत (वर्तमान तक वैधता) एवं कर्मचारी राज्य बीमा निगम रायपुर से पंजीयन कराकर कोड प्राप्त कर लिया गया हो वे निविदाकार ही निविदा हेतु पात्र होंगे। कर्मचारी भविष्य निधि संगठन (ई.पी.एफ.) एवं विभिन्न प्रावधानों की धारा 1952 के तहत निविदाकार का जीवित पंजीयन होना आवश्यक है साथ ही निविदा आमंत्रण दिनांक से विगत 03 माह की अवधि में जमा किये गये TRRN Payment Details चालान की प्रति प्रस्तुत करना तथा ऑनलाईन अपलोड किया जाना अनिवार्य होगा एवं विस्तृत निविदा आमंत्रण सूचना ठेकेदार के हस्ताक्षर सहित निविदा दस्तावेजों के साथ प्रस्तुत करना अनिवार्य होगा।
- कार्य हेतु लिफाफे पर कार्य का नाम निविदा आमंत्रण सूचना क्रमांक, निविदा खुलने की तिथि स्पष्ट रूप से लिखकर भेजना होगा।
- निविदाकार का यह दायित्व है कि वे निविदा भरने के पूर्व स्थल का स्वयं निरीक्षण कर लेवें ताकि प्रारंभ करने में किसी प्रकार की कठिनाई न हो।
- निर्धारित निविदा प्रपत्र में उल्लेखित कड़िकाएँ स्वमेव लागू मानी जावेगी एवं निविदा आमंत्रण सूचना निविदा का ही भाग माना जावेगा।
- निर्धारित प्रारूप में निविदा प्रपत्र, निविदा प्रपत्र शुल्क, अमानत राशि, निविदा आमंत्रण सूचना पत्र में उल्लेखित दस्तावेज सही पाए जाने पर ही निविदा दर संबंधी लिफाफा खोला जावेगा अन्यथा निविदा निरस्त कर दी जावेगी।
- ठेकेदार को अपनी दरे शर्तों एवं अंकों में लिखना अनिवार्य होगा।
- शासन के विभिन्न विभागों जैसे:- खजिन विभाग, श्रम विभाग, समाज कल्याण विभाग इत्यादि विभागों द्वारा समय-समय पर जारी निर्देशों/आदेशों के पालन की समस्त जिम्मेदारी संबंधित ठेकेदार की होगी।
- ठेकेदार यदि कार्य को अपूर्ण स्थिति में छोड़ता है तो निविदा प्रपत्र में उल्लेख अनुसार इस संबंध में प्रावधान के अंतर्गत कार्यवाही की जावेगी।
- कार्य प्रारंभ नहीं करने अथवा अपूर्ण स्थिति में छोड़ने पर निगम द्वारा ठेकेदार के विरुद्ध निविदा शर्तानुसार एवं मेयर इन काउंसिल के निर्णयों के अनुरूप कार्यवाही की जावेगी जिसकी संपूर्ण जवाबदारी ठेकेदार की होगी।
- सफल निविदा दाता से अनुबंध के समय अतिरिक्त परफार्मेंस राशि जमा कराई जावेगी जबकि निविदा की दरों में काफी कमी हो जैसे निविदादाता को निविदा दर एवं अनुमानित लागत से 10 प्रतिशत से अधिक निविदा दर होने पर सफल निविदादाता को निविदा दर एवं अनुमानित लागत के 90 प्रतिशत अंतर की राशि के समतुल्य परफार्मेंस गारंटी के रूप में राष्ट्रीयकृत बैंक का एफ.डी.आर./टी.डी.आर. ऑफिस, टाईम डिपॉजिट अथवा एन.एस.सी. जो कि आयुक्त नगर पालिक निगम कोरबा के नाम से देय होगा, जो मांग तिथि से 15 दिवस के भीतर जमा करना अनिवार्य होगा। उपरोक्त राशि को जमा न करने की दशा में निविदा निरस्त कर दी जावेगी।


निम्न किये गये कार्यों के लिये 5 प्रतिशत सुरक्षा राशि रनिंग देयको के साथ 01 वर्ष हेतु साथ ही मरम्मत एवं संभारण प्रकृति के कार्यों को छोड़कर शेष राशि वार्षिकी हेतु समयावधि की गणना कार्य पूर्णता तिथि से किया जावेगा। सुरक्षा राशि एवं परफार्मंस गारंटी प्राधिकारी के सन्तुष्टि के आधार पर भुगतान किया जावेगा।

17. निविदा में भाग लेने वाले ठेकेदारों को छ.ग. भवन और अन्य सन्निर्माण कर्मकार (नियोजन एवं सेवा शर्तों का विनियमन) अधिनियम 1996 एवं तदन्तर्गत निर्धारित नियमों के तहत पंजीयन कराना आवश्यक होगा तथा निर्माण लागत का 1 प्रतिशत उपकर के रूप में प्रत्येक देयक से कटौती की जावेगी।
18. निविदाकार को प्रत्येक निविदा में पंजीयन क्षमता के अंतर्गत वर्तमान में नगर निगम या अन्य विभागों में किये जा रहे कार्यों का विवरण राशि रु. 100/- नान् ज्युडिशियल स्टॉम्प पेपर पर निष्पादित शपथ पत्र निविदा दस्तावेजों के के साथ संलग्न करना अनिवार्य होगा।
19. ईट से संबंधित निर्माण कार्यों में फ्लाई ऐश ब्रिक्स का उपयोग किया जाना अनिवार्य होगा।
20. निविदा प्रपत्र अहस्तांतरणीय होगा एवं सशर्त निविदाओं पर विचार नहीं किया जावेगा।
21. निविदा के संबंध में किसी प्रकार की विवाद होने की स्थिति में आयुक्त, नगर पालिक निगम कोरबा का निर्णय अंतिम एवं सर्वमान्य होगा।
22. निविदा प्रपत्र From-A के क्लॉज नंबर-11 अनुसार एस्केलेशन देय नहीं होगा।
23. निविदा में सफल निविदाकारों को ऐसे कार्य जिसकी अनुबंध राशि 10.00 लाख या उससे अधिक है उनको प्रत्येक कार्यों हेतु पृथक से छ.ग. भवन और सन्निर्माण कर्मकार मण्डल का पंजीयन का प्रमाण प्रस्तुत करना अनिवार्य होगा अन्यथा देयक भुगतान किया जाना संभव नहीं होगा।
24. कार्य क्रियान्वयन से संबंधित गुणवत्ता परीक्षण संबंधी रिपोर्ट पर होने वाले व्यय का वहन संबंधित ठेकेदार द्वारा किया जावेगा।
25. ठेकेदार को निर्माण कार्य के दौरान "निर्माण एवं अपशिष्ट प्रबंधन नियम 2016" में किये गये प्रावधानों का पालन करना अनिवार्य होगा।
26. ठेकेदार द्वारा संपादित किये गये कार्यों के देयकों का भुगतान बजट आवंटन और राशि उपलब्ध होने पर किया जावेगा।
27. निविदा स्वीकृत करने अथवा अस्वीकृत करने का अधिकार नगर पालिक निगम के पास सुरक्षित रहेगा।
28. निविदा खुलने की तिथि में अवकाश होने पर आगामी तिथि (कार्य दिवस) को निविदा संबंधी कार्यवाही मानी जावेगी।

प्रतिलिपि :-

1. प्रोग्रामर, संचालनालय, नगरीय प्रशासन एवं विकास विभाग, मंत्रालय अटल नगर नया रायपुर (छ.ग.) को uad.cg.gov.in में अपलोड किये जाने हेतु प्रेषित।

हस्ताक्षर —
फर्म का नाम —
पता —
मोबाई नंबर —


कार्यपालन अभियंता
नगर पालिक निगम
कोरबा (छ.ग.)

OFFICE OF THE NAGAR PALIK NIGAM, KORBA (C.G.)

DETAILED ESTIMATE

Name Of Work :- वार्ड क्र. 49 अंतर्गत राजीव नगर, उडिया बस्ती में स्थित मंगल भवन का मरम्मत, संधारण और जीर्णोधार कार्य।

(सर्वेक्षण नं. 2025-26)

As Per SOR :-SCHEDULE OF RATES PUBLIC WORKS DEPARTMENT [PWD BUILDING 01.01.2015]

S.N.	REF	ITEM DESCRIPTION	N	L	B	H/D	QTY	UNIT	RATE	AMOUNT
1	1.2	Surface dressing of the ground including removing vegetation and making up undulations and inequalities not exceeding 15 cms in depth/ height including disposal of rubbish upto 1.5 m lift and lead upto 50m (at least 5m away from the dressed area)								
			1	135.00	6.00		810.00			
						Total	810.00	sqm	7.20	5832.00
2	1.1	Excavation for all types and sizes of foundations, trenches and drains or for any other purpose including disposal of excavated stuff upto 1.5 m lift and lead upto 50m (at least 5m away from the excavated area), including dressing and leveling of pits.								
	1.1	In all types of soils.	1	130.00	4.00	0.30	156.00			
						Total	156.00	Cum	185.00	28860.00
3	1.17	Filling from available excavated stuff (Excluding rock) in trenches, plinth, sides of foundation etc. in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering with a lead upto 50 M. and lift upto 1.5 M								
			2	130.00	0.50	0.25	32.50			
						Total	32.50	Cum	65.00	2112.50
4	1.26	Carriage by mechanical transport upto 5 km lead:								
	26.1	Earth					60.00	Cum	111.00	6660.00

5	3.1	Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work.							
	1.4	1:4:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 40mm nominal size).							
			2	130.00	1.65	0.10	42.90		
						Total	42.90	Cum	3552.00
									152380.80
6	3.1	Providing and laying nominal mix plain cement concrete with crushed stone aggregate using concrete mixer in all works upto plinth level excluding cost of form work.							
	1.5	1:1½:3 (1 cement : 1½ coarse sand : 3 graded stone aggregate 20mm nominal size).							
			2	130.00	1.50	0.15	58.50		
						Total	58.50	Cum	4073.00
									238270.50
7	12.24	Extra for providing and fixing 4mm thick AC sheet strip in joints of cement concrete floor or like							
			2	51.00	1.50	0.15	22.95		
						Total	22.95	Sqm	268.00
									6150.60
8	1.18	Providing and filling in plinth with sand/ Crusher dust and hard moorum under floor in layers not exceeding 20cm in depth consolidating each deposited layer by ramming and watering, including dressing etc. complete.							
			1	130.00	4.00	0.10	52.00		
						Total	52.00	Cum	371.00
									19292.00
9	2.1	Providing and fixing form work including centring, shuttering, strutting, staging, propping bracing etc. complete and including its removal at all levels, for:							
	1.1	Foundations, footings, bases of columns plinth beam, curtain wall in any shape and size and all type of wall below plinth level.							
			2		130.00	0.10	26.00		
			2		130.00	0.10	26.00		

			2	51.00	1.65	0.15	25.25			
			2	2.00	150.00	0.15	90.00			
			2	51.00	1.50	0.15	22.95			
							Total	190.20	Sqm	139.00
										26437.11
10	14.97	Removing of paint on internal plastic emulsion enamel paint by scraping sand papering and preparing the surface smooth including necessary repair to scratches etc complete								
							252.00	Sqm	8.00	2016.00
11	14.98	Removing of paint on external surface exterior emulsion /cement paint by scraping sand papering and preparing the surface smooth including necessary repair to scratches etc complete								
							201.40	Sqm	10.00	2014.00
12	14.56	Providing and applying 2mm thick white cement based polymeric exterior grade putty with minimum 3 coat applied @ 5.4 kg/10 sqm as per relevant IS code 17545:2021 (product such as birla wall care asian trucare JK wall putty berger bison wall putty) to make the surface smooth and even with all tools tackles and labour etc complete for the work.					453.40	Sqm	86.00	38992.40
13	14.60	Providing and applying of Acrylic primer on all surface applied @ 0.80 litres/10 sqm as per relevant I.S. code 15489:1974 (product such as asian spark/suprimo J.K. primer Dulux Acrylic primer) With all tools tackles and labour etc complete for the work.								
							453.40	sqm	37.00	16775.80

14	14.64	providing and applying premium plastic emulsion paint with roller application minimum three coat applied @ 0.75 lit/ 10 sqm up to final finish as per relevant IS code 15489:2013 type 1 class D & C (Glossy and semi Glossy finish) Cleanin of door window floor and surface as required with all tools tackles and labour etc complete for the work with 3 year warranty								
							252.00	Sqm	84.00	21168.00
15	14.68	P/A on exterior surface with premium exterior emulsion paint of required shade to give protective and water proof finish minimum 3 coat applied @ 1.40lit/10sqm up to final finish as per relevant IS Code 15489:2013 type 2 class D, C (Glossy/semi slossy finish) window floor and surface as required with all tools tackles and labour etc complete for the work (with 3 year Warranty)								
							201.40	Sqm	84.00	16917.60
16	14.71	providing and applying satin/matt finish Enamel paint minimum 2 coat in all surface applying @ 0.75 lit/10 sqm up to required finish as per relevent IS code 2932:2013 of (product such as asian satin enamel dulux promise premium enamel nerolac synthatic enamel opus prime enamel) inclusive of providing abro tape on edges and article and cleaning of door windows floor and surface as requirred with all tools tackle and labour etc complete for the work								
			1.50	3.00		2.40	10.80			
			4	1.10	1.00	2.10	9.24			
			12	1.10	1.20	1.20	19.01			
			1	4.00	0.60	0.45	1.08			
						Total	40.13	Sqm	133.00	5337.02

17	17.1	Repairs to plaster in patches of area 2.5 sq. metres and under including cutting the patch in proper shape, raking out joints and preparing and plastering the surface of the walls with cement mortar 1:4 (1 cement : 4 fine sand) complete including disposal of rubbish to the dumping ground within 50metres lead :								
	1.2	Thickness more than 15mm and upto 20mm								
			1.50			1.20	1.80			
			1.00			1.90	1.90			
			1.20			1.80	2.16			
			1.80			1.70	3.06			
			2.00			1.00	2.00			
			1.50			1.00	1.50			
			2.50			1.00	2.50			
			1.30			1.40	1.82			
			1.80			1.80	3.24			
						Total	19.98	Sqm	148.00	2957.04
18	17.2	Providing and replacing broken floor tile with ceramic glazed floor tiles conforming to IS : 15622 of approved size, make, colour, shade laid on 20 mm thick Cement Mortar 1:4 (1 cement : 4 coarse sand) including removing the broken tile and mortar, pointing the joints with white cement mixed with matching pigment etc., complete.								
			2.00	1.50		2.40	7.20	Sqm	1151.00	8287.20
19	17.6	Providing and replacing broken floor tile with vitrified floor tiles with double charge/ multi charge printing with water absorption less than 0.5% and conforming to IS : 15622 of approved make in all colours and shades and size mentioned below (+/- 10mm), laid on 20mm thick cement mortar 1:4 (1 cement : 4 coarse sand) including removing the broken tile and mortar, grouting the joints with white cement and matching pigments etc. complete:								
	6.1	Size 600x600mm	1.00	3.00		5.00	15.00	Sqm	1611.00	24165.00

20	17.7	Providing and replacing broken vitreous china water closet squatting pan (Indian type) including removing the broken squatting pan and mortar, cutting and making good the walls and floors wherever required:								
	7.1	White Long pattern W.C. pan of size 580 mm					1.00	each	1448.00	1448.00
21	17.19	Providing and fixing 16 mm M.S. Fan clamps of standard shape and size in existing R.C.C. slab including cutting chase and making good and painting exposed portion of the clamps complete.					2.00	each	144.00	288.00
22	17.29	Renewing bottom rail and/or top runner of collapsible gate including making good all damages and applying priming coat of zinc chromate yellow primer of approved brand and manufacturer					80.00	kg	95.00	7600.00
23	9.6	Steel work welded in built up sections/ framed work including cutting, hoisting, fixing in position and applying a priming coat of red oxide zinc chromate primer.								
	6.2	In gratings, frames, guard bar, ladder, railings, brackets, gates and similar works.					110.00	kg	68.00	7480.00
24	7.5	Brick work with modular fly-ash lime bricks (FaLG Bricks) confirming to IS:12894-2002 of class designation 4.0 in foundation and plinth in:								
	5.1	Cement Mortar 1:3 (1 cement : 3 coarse sand)								
			1	2.00	1.20	0.20	0.48			
			1	2.00	0.90	0.20	0.36			
			1	2.00	0.60	0.20	0.24			
						Total	1.08	cum	3641.00	3932.28

25	4.16	Providing and laying 3mm thick APP (Atactic Polypropylene Polymer) modified prefabricated five layer 3mm thick water proofing membrane, black finished reinforced with non-woven polyester matt consisting of a coat of bitumen primer for bitumen membrane @ 0.40 ltr/sqm. by the same membrane manufacture of density at 25°C, 0.87-0.89 kg/ltr and viscosity 70-160 cps. Over the primer coat the layer of membrane shall be laid using Butane Torch and sealing all joints etc								
			1.00	8.00		12.50	100.00	Sqm	396.00	39600.00
26	18.76	Providing and fixing on wall face or under floor UV stabilized Unplasticised Rigid PVC pipes (single socketed) having 3.2mm wall thickness conforming to IS : 13592 (4kg/sqcm) including required couplers, jointing with seal ring conforming to IS : 5382 leaving 10 mm gap for thermal expansion etc complete								
	76.2	110 mm dia pipe.					12.00	metre	267.00	3204.00
27	19.5	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings								
	5.1	15 mm nominal outer dia .Pipes.					12.00	metre	133.00	1596.00
	5.2	20 mm nominal outer dia .Pipes.					6.00	metre	167.00	1002.00
28	19.13	Providing and fixing 15 mm nominal bore Brass bib/stop cock of approved quality:								
	13.2	Bib cock (350 grams)					2.00	Each	237.00	474.00
	13.3	stop cock (350 grams)					2.00	Each	237.00	474.00
29	19.17	Providing and fixing ball valve (brass) of approved quality, High or low pressure, with plastic floats complete :								
	17.1	15 mm nominal bore					2.00	Each	284.00	568.00
	17.2	20 mm nominal bore					2.00	Each	394.00	788.00


	Non SOR									
30	Plastic Sheet for Separate Membrane 150 micron pvc sheat									
						70.00	kg	96.00	6720.00	

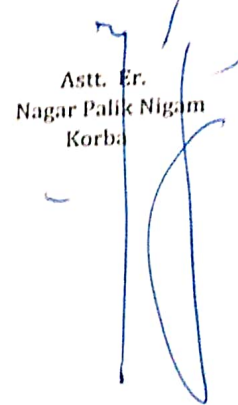
As per Estimate Amount Rs.

699799.85

Say Rs.

7,00,000/-


Sub Er.
Nagar Palik Nigam
Korba


Asth. Er.
Nagar Palik Nigam
Korba